

REF5-BB – For freestanding use or installation below standard 36" high counter. 4.2 cu ft (1.2 cu m) capacity, stores up to (50) 450ml bags.

High performance, undercounter blood bank refrigerator with two full extension stainless drawers. Separate temperature surveillance module includes audible/visual alarm, 7-day chart recorder and digital product temperature display.



Outstanding temperature performance meets requirements of AABB, ANRC and FDA

- Powerful refrigeration system with heavy-duty 1/4 hp compressor, forced air cooling and microprocessor-based controller
- Factory preset to +3.5°C, maintains +/-1°C cabinet temperature
- Set point adjustable between 1°C and 6°C
- Quick pull down and rapid recovery following frequent or extended door openings
- Automatic, off-cycle defrost eliminates manual defrosting while maintaining product temperature

TruTrak™ drawer system delivers easy, trouble-free rolling

- Two full extension stainless drawers store up to (50) 450ml bags
- Shielded stainless ball bearing rollers and stainless tracks eliminate binding and uneven wear of loose bearing systems
- Drawers and slides lift out without tools for easy cleaning
- Track/drawer interface minimizes risk of catching tubing in slides

All-in-one temperature surveillance module provides security for blood supplies

- Audible and/or visual alarm with user-selectable high and low setpoints
- Chart recorder with easy-to-read 6 inch chart
- Dry contacts to connect to remote alarm system
- Digital product temperature read-out
- LED power status indicator
- 15 foot probe lead with immersible stainless tip
- 6 foot power cord and AC adapter
- Battery backup for continuous monitoring during power failure
- Surface or wall mount ready






All-in-one temperature
surveillance module

Quality construction and design details


- Durable stainless interior and exterior
- High-density CFC-free foam insulation
- Field-reversible door with full magnetic gasket
- Heavy-duty edgemount hinges and positive locking latch
- Back access port for probe entry
- Front-mounted product simulation bottle

Options and accessories

- Factory-installed keypad lock (item# 00162206)
- Replacement charts (item #00162099)
- Replacement pens (item #00162081)

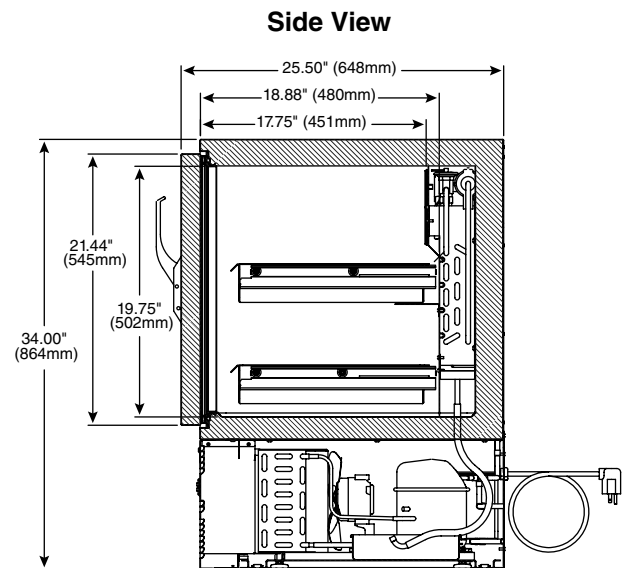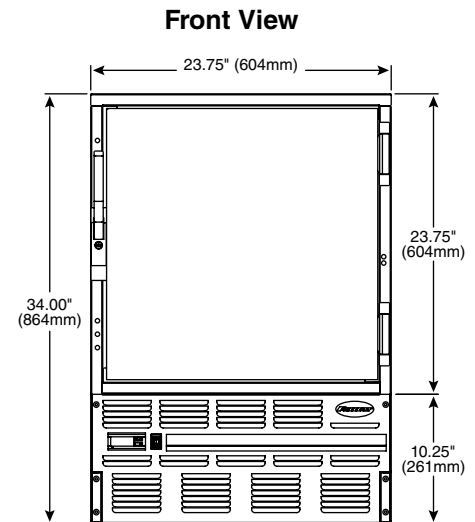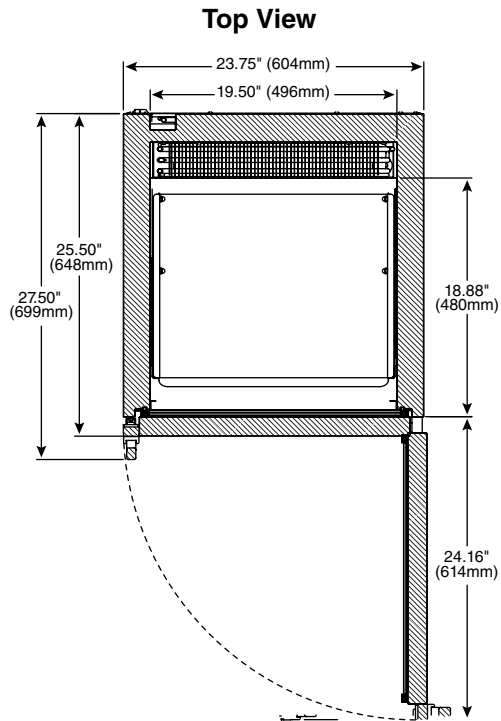

Handle Detail
all models



Plug Detail
all models
NEMA 5-15



Approximate Shipping Weight 205 lbs (93kg)

Electrical

115V, 60Hz, 1 ph, 8.0 FLA, maximum fuse – 15 amps.
NEMA 5-15 hospital grade cord and plug.

Temperature surveillance module

- Overall dimensions 7.5" (191mm) wide x 7.5" (191mm) high x 3.25" (83mm) deep

Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.